


## Model: HT-912T/922T

A VoIP ATA (Analog Terminal Adapter) is a telephone extension to the IP network. It offers a traditional telephone line (PSTN) interface to an analog telephone, PBX line extension, or a fax machine. Its WAN port interface allows access to the IP network in order to offer voice and fax services. It is a great way for turning a traditional PBX to access the low cost VoIP services and for deploying VoIP service by an ISP. An additional Ethernet port allows broadband connection for the existing PC or other network device without buying additional network equipment. It is an ideal low cost product for SME and SOHO IP telephony application.

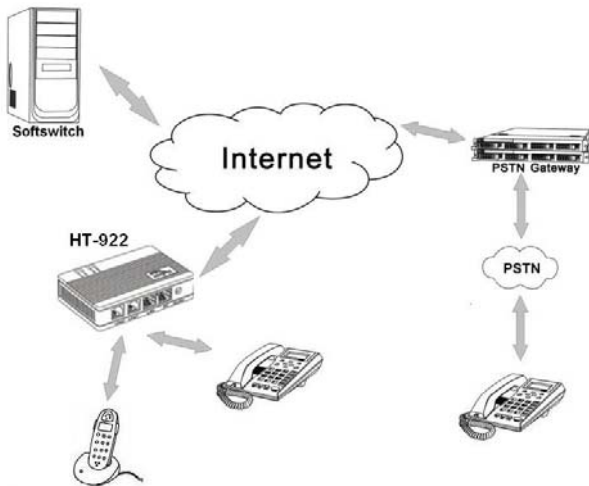

### Advanced System Features

- Network interface setup wizard for DHCP, PPPoE, or fixed IP network environment
- Auto configuration support (Plug-n-Play) in encrypted or plain-text format
- Smart firmware management support (no need for manual firmware upgrade)
- Compatibility in multi-vendor open architecture VoIP networks
- Dynamic DNS (DDNS) support
- NTP and redundant DNS servers support
- QoS (TOS, Diff-Serve, 802.1p/q VLAN)
- PPTP VPN Client
- NAT/Firmware traversal support with session border controller or STUN server
- Multi-language support

### Standards Supported

- Open system SIP VoIP architecture for seamless integration into multi-vendor VoIP networks
- Standards include : H.323 V4.0, SIP 2.0, TCP/UDP/IP, RTP/ RTCP, HTTP, ARP/RARP, ICMP, DNS, DHCP, NTP, TFTP, MD5 authentication, TOS, Diff-Serve, VLAN, PPTP.
- CODECs: G.711(a-law/u-law), G.729A/B, G.723
- In-band/Out-band (RFC-2833/SIP INFO) DTMF dialing



**HT-912T/922T**

### Key Features

- SIP/H.323 protocols supported
- 2 Ports Ethernet switch with router function
- FXS port interface with traditional phone or PBX trunk line
- Support T.38
- Caller ID Signal Generation for VoIP Calls
- Support T.38
- Call Hold
- Call Forward
- Call Transfer
- Dial Plan
- Hot Line
- Call Waiting Function
- Phone Book
- Predefined User Commands for special call operations
- Configuration via built-in web server or auto provisioning server
- Voice Prompts for LAN and PC Port Addresses

### Model HT-912T: One FXS Port ATA

### Model HT-922T: Two FXS Ports ATA

### Package Content

- HT-912T or HT-922T ATA
- AC/DC power adapter
- Ethernet cable

### Regulatory Approval: CE, FCC

### Warranty: ONE YEAR

### Contact Information:

DBL Technology Limited

Email: [ivy@dbltek.com](mailto:ivy@dbltek.com)

Website: <http://www.dbltek.com>